



Plain Coping

Our Plain Coping offers a simple and practical option where coping is required with limited detail.

Section

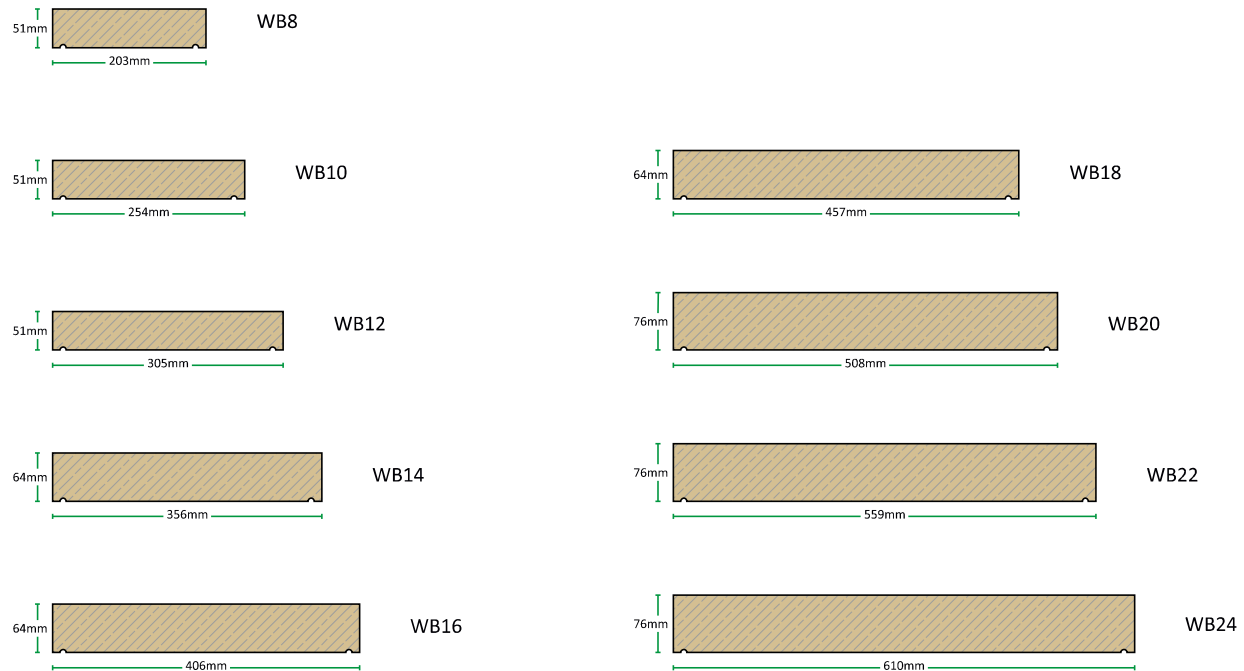

Typical installation detail

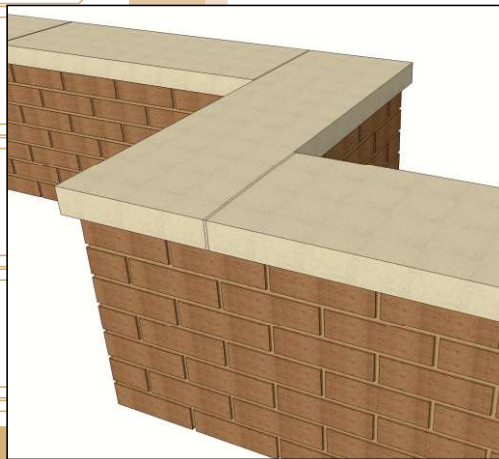

Due to its simple nature, our Plain Coping can be used in a number of configurations with ease. Please let us know if you require ends or returns as these can be made by simply modifying the placement of the drip channel.

If you require any further information, please call 01258 472685 and ask to speak to a member of our technical department.

| Code | Max.* | | | | |
|------|-------------|------------|-----------------|-------------|-------------|
| | Height (mm) | Width (mm) | Wall Width (mm) | Length (mm) | Weight (Kg) |
| WB8 | 51 | 203 | 153 | 1000 | 22 |
| WB10 | 51 | 254 | 204 | 1000 | 27 |
| WB12 | 51 | 305 | 255 | 1000 | 33 |
| WB14 | 64 | 356 | 306 | 1000 | 48 |
| WB16 | 64 | 406 | 356 | 1000 | 55 |
| WB18 | 64 | 457 | 407 | 1000 | 61 |
| WB20 | 76 | 508 | 458 | 1000 | 81 |
| WB22 | 76 | 559 | 509 | 1000 | 89 |
| WB24 | 76 | 610 | 560 | 1000 | 97 |

*Maximum wall width allows 25mm either side for drip and overhang.