



Two Brick Cill without Stools CL016

Our CL016 Two Brick cills are designed to fit standard brick coursing without penetrating the cavity.


Plan and Elevation of our standard opening sizes

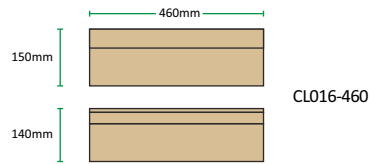


CL016-460

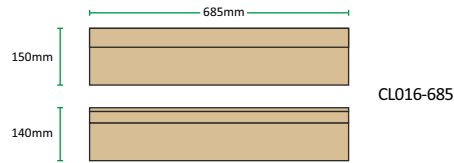


CL016-685

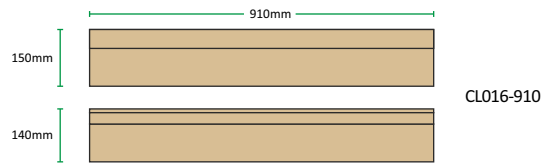


CL016-910

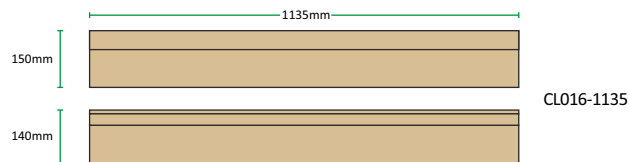


CL016-1135

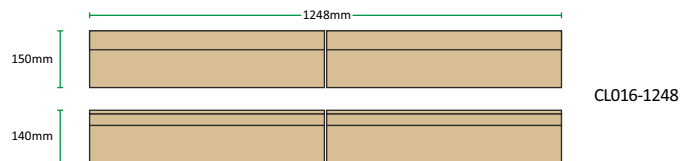


CL016-1248

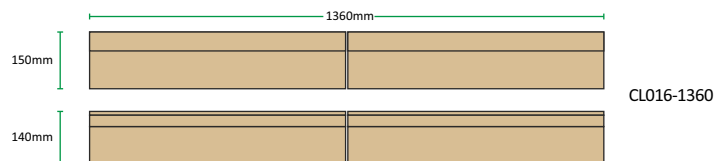


CL016-1360

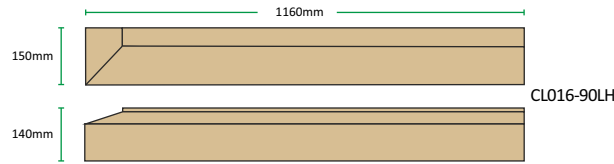


CL016-90LH

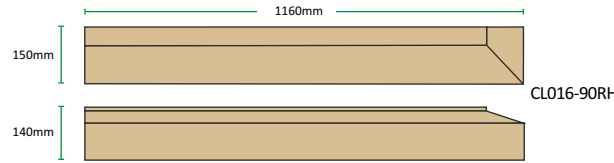


CL016-90RH

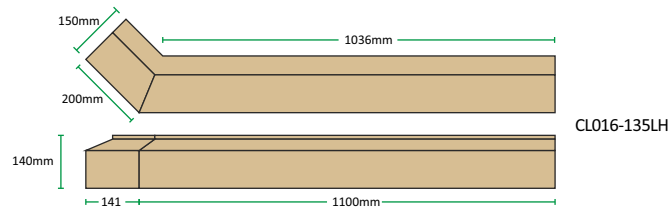


CL016-135LH

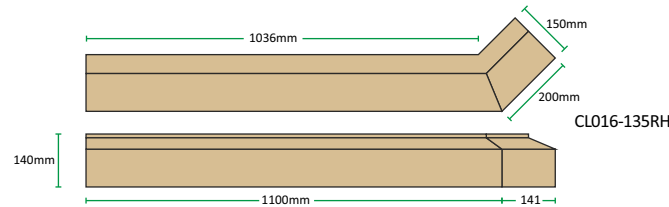

CL016-135RH

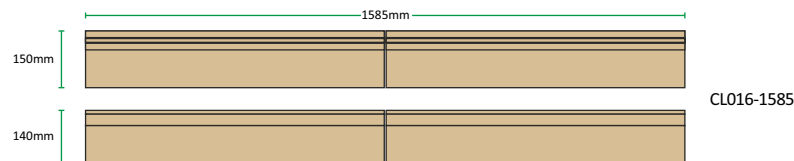


CL016-1585

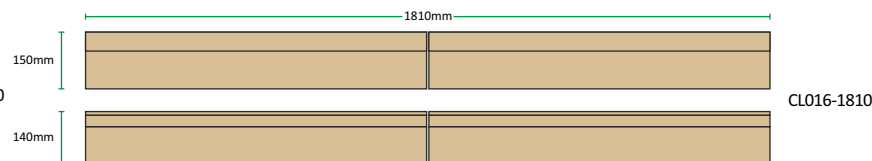

CL016-1810

Code	Height (mm)	Width (mm)	Brick opening length	Overall length (mm)	Weight (Kg)	No. of sections
CL016-460	140	150	460	460	18	1
CL016-685	140	150	685	685	27	1
CL016-910	140	150	910	910	35	1
CL016-1135	140	150	1135	1135	44	1
CL016-1248	140	150	1248	1248	49	2
CL016-1360	140	150	1360	1360	53	2
CL016-1585	140	150	1585	1585	62	2
CL016-1810	140	150	1810	1810	71	2
CL016-90LH	140	150	N/A	1160	45	1
CL016-90RH	140	150	N/A	1160	45	1
CL016-135LH	140	150	N/A	1241	52	1
CL016-135RH	140	150	N/A	1241	52	1



Section

Our Cills are available to fit standard openings or a bespoke opening to your request. Internal Stainless steel reinforcing and lifting lugs can be cast in to order. If you require any further information, please call 01258 472685 and ask to speak to a member of our technical department. All joints shown 6mm.